



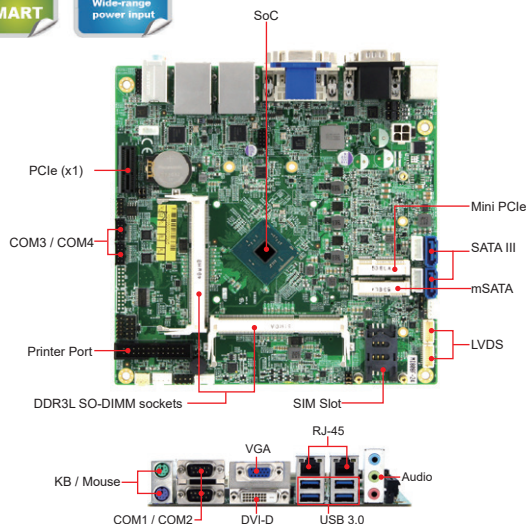

Features

- Onboard Intel® Pentium® QC N3710, up to 2.56GHz or Celeron® DC N3010, up to 2.24GHz
- 2x DDR3L SO-DIMM sockets, Max. 8GB
- Supports VGA, DVI-D and 24-bit dual-channel LVDS
- Dual Intel® Gigabit LAN
- Watchdog Timer, Digital I/O, iSMART, TPM (2.0)
- 4x USB 3.0, 2x USB 2.0, 4x COM, 2x SATA III
- 1x PCIe (x1), 1x Mini PCIe, 1x mSATA, 1x CFast



Specifications

CPU Socket	FCBGA1170
CPU	Intel® Pentium® N3710, up to 2.4GHz or Celeron® N3010, up to 2.24GHz
PCH	N/A
Memory	2x DDR3L-1600 SO-DIMM socket, Max. 8GB
BIOS	AMI
Watchdog Timer	256 levels
Storage Device Interface	1x mSATA, 1x CFast (option)
H/W Monitor	Yes
Expansion Slots	1x PCIe (x1)
Mini Type Slots	1x Mini PCIe
Graphics Controller	Intel® Pentium® SoC integrated Intel® Gen-8 graphics
Video Output	Supports DVI-D, CRT 24-bit dual-channel LVDS
Ethernet	Intel® I211AT or I210AT Gigabit LAN
I/O Chipset	Fintek F81846AD-I
Serial Port	1x RS232/422/485 (jumperless selection) 3x RS232, PS/2 keyboard/mouse 1x printer port
USB 2.0	2x USB 2.0 via pin-header
USB 3.X	4x USB 3.0 on board
Serial ATA	2x SATA III
Audio	Intel® Pentium SoC built-in HD audio + Realtek ALC269 codec
TPM	TPM (2.0)
Others	Digital I/O (4-in/4-out); 12V DC-in or 18V~24V DC-in; iSMART; TPM (2.0); SIM card slot, CFast (option)
Dimensions (L x W)	170mm x 170mm (6.7" x 6.7")
Power Consumption	Intel® Pentium® Processor N3710 1.6GHz w/ 2x 4GB DDR3L-1600 +19V: 1.01A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	90% (non-condensing @60°C)

Ordering Information

MI808F-371	Intel® Pentium® N3710 (2.56GHz) Mini-ITX motherboard with heatsink, DVI-D, VGA & LVDS, 2x Gigabit LAN, iSMART 3.2, TPM (2.0), DC-in 12V only
MI808FW-371	Intel® Pentium® N3710 (2.56GHz) Mini-ITX motherboard with heatsink, DVI-D, VGA & LVDS, 2x Gigabit LAN, iSMART 3.2, TPM (2.0), 18V~24V DC-in
MI808F-301 (w/ MOQ)	Intel® Celeron® N3010 (2.24GHz) Mini-ITX motherboard with heatsink, DVI-D, VGA & LVDS, 2x Gigabit LAN, iSMART 3.2, TPM (2.0), DC-in 12V only
MI808FW-301 (w/ MOQ)	Intel® Celeron® N3010 (2.24GHz) Mini-ITX motherboard with heatsink, DVI-D, VGA & LVDS, 2x Gigabit LAN, iSMART 3.2, TPM (2.0), 18V~24V DC-in

Dimensions and Drawing

